

PIPE/PENETRATION FLASHING - CONICAL

Trade Names: Roof Flashing, Pipe Boot, Roof Jack, Roof Safe, Plumbers Flashing, Plumbers Boot, Pipe Vent Flashing

Flashing Material & Standard Thicknesses:

- | | | |
|--|--|--|
| <input type="checkbox"/> TPO 60mil Reinforced (1.52mm) | <input type="checkbox"/> PVC 60mil Reinforced (1.52mm) | <input type="checkbox"/> Lead 4# (.063") |
| <input type="checkbox"/> TPO 60mil Unreinforced (1.52mm) | <input type="checkbox"/> PVC 60mil Unreinforced (1.52mm) | <input type="checkbox"/> Zinc 26ga. (.019") |
| <input type="checkbox"/> Galvanized Steel 26ga. (.019") | <input type="checkbox"/> Galvanized Steel 24ga. (.025") | <input type="checkbox"/> Copper 16 oz. (.022") |

Other: _____

Drawing for Non-Standard

(See Product Catalog for Standard Flashings)

Specify Dimensions (inches)

A(t): Diameter @ Top _____


A(b): Diameter @ Bottom _____

B: Riser Height _____

C: Flange _____

D: Base Size _____

E: Base Shape: Round Square

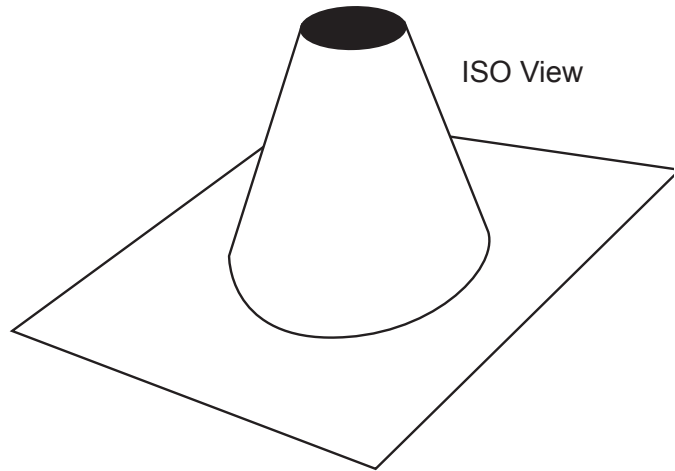

Riser Height: Recommend 8" minimum


Standard Flange 4" 6" Other _____

Quantity: _____

Low Slope: 90° Angle

Steep Slope: Angle or Pitch: _____

Use one sheet per size.

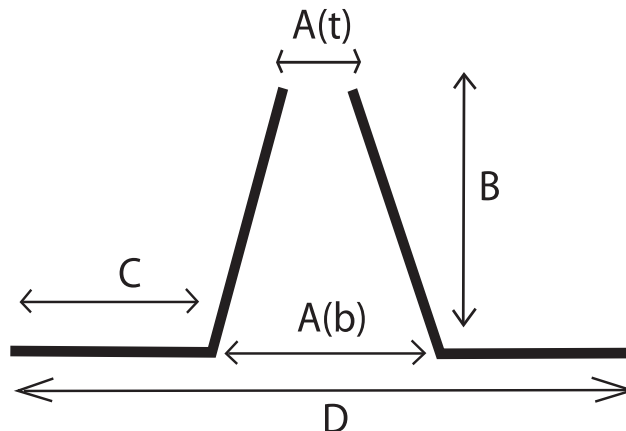

For Sales and Service:

Phone: 866-323-5274 • Fax: 707-824-5858 • E-mail: sales@FlashCoMfg.com

**Drawing: CN002 Conical
Pipe/Penetration Flashing**

FlashCo 
Manufacturing, Inc.

©2011 FlashCo Manufacturing, Inc.