

## FlashAccessory™

# INSIDE & OUTSIDE CORNERS

TPO Low Slope Systems


### OVERVIEW

FlashCo's TPO FlashAccessory Inside and Outside Corners are Factory Certified prefabricated flashings made from 60 mil reinforced TPO membrane. They are designed to provide a 6" flange in all directions from potential leak points at corners. FlashCo offers both inside and outside corner designs for interior facing 90° parapets and concave corners as well as exterior facing 90° curbs and convex corners.

**Custom sizes & colors available.**

### INSTALLATION

1. Center the corner where both vertical faces meet and intersect the roof deck
2. Begin welding at the centermost point, progressively working outwards
3. Probe the edge of the membrane on all three faces
4. Apply cut edge sealant (provided by others)

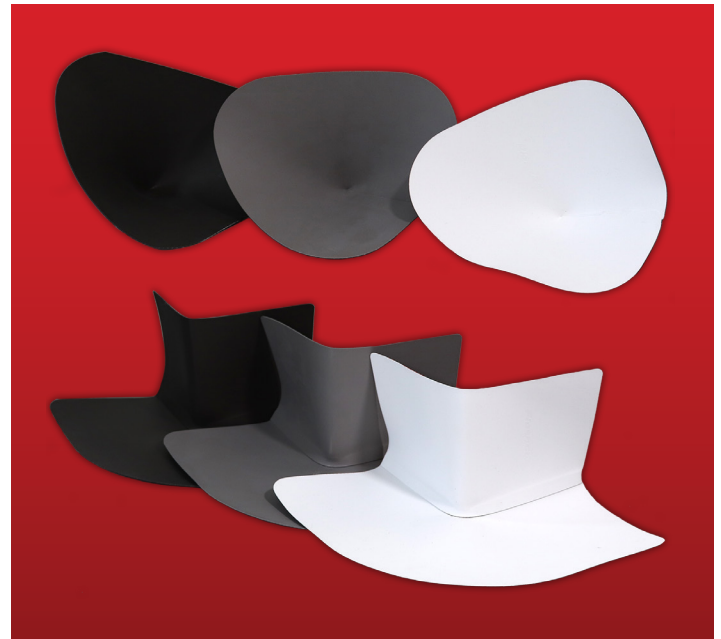

Colors Shown L-R: Dark Bronze, Slate Gray, White

### FEATURES AND BENEFITS

- Saves up to 60% of labor compared to field fabrication
- Better fit and more uniform appearance than field flashing
- Reinforced membrane provides more strength at critical points

### SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- All major membrane manufacturer brands in stock in all five FlashCo plant locations
- Get off the roof sooner
- Reduce installed costs

### STANDARD SIZES, PACKAGING, MATERIALS & COLORS

Description	Qty/Box	Wt./Box	Box Size	Material	Colors
Inside Corner	24 ea.	7 lbs.	12"x12"x12"	60 mil Reinforced TPO	White, Gray, Tan Dark Bronze Slate Gray
Outside Corner	24 ea.	8 lbs.	16"x16"x12"	60 mil Reinforced TPO	White, Gray, Tan Dark Bronze Slate Gray

Also available in custom sizes & colors

