

# FlashAccessory™ T-JOINT COVERS

TPO Low Slope Systems


## OVERVIEW

FlashCo's FlashAccessory TPO T-Joint Covers are factory cut and used to cover and seal the intersections of three or more layers of membrane, also known as "step-offs." FlashCo's T-Joint Covers are made with 60 mil non-reinforced TPO and measure 4.5" in diameter. They are available in white, gray, tan, dark bronze, slate gray and other colors upon request. Standard packaging is 100 T-Joint Covers bagged and boxed.

## INSTALLATION

Installation shall be installed in accordance with the recommendations and specifications of the roofing material manufacturer. Keep T-Joints in plastic bag in until installation to avoid an oxidation.

1. Center T-Joint Cover over the intersection in the membrane field.
2. Begin heat welding at center point, progressing outwards as you weld.
3. Completely weld the cover, using the edge of the roller to press the T-Joint Cover into step-offs.

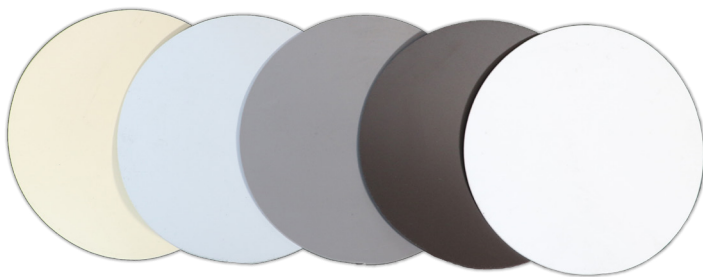

Colors Shown L-R: Tan, Gray, Slate Gray, Dark Bronze, White



Colors Shown L-R: Tan, Gray, Slate Gray, Dark Bronze, White

## FEATURES AND BENEFITS

- Each T-Joint Cover is uniform in shape and size
- Available in multiple colors
- Faster and easier than hand cut patches
- Made with quality TPO for reliable welds

## SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- All major membrane manufacturer brands in stock in all five FlashCo plant locations
- Get off the roof sooner
- Reduce installed costs

## STANDARD SIZES & PACKAGING

Description	4.5"
Material	60 mil non-reinforced TPO
Quantity	100 T-Joint Covers bagged & boxed
Packaging Size	6"x6"x6" box
Box Weight	3.5 lbs.
Colors	White, Gray, Tan, Dark Bronze, Slate Gray (other upon request)

